
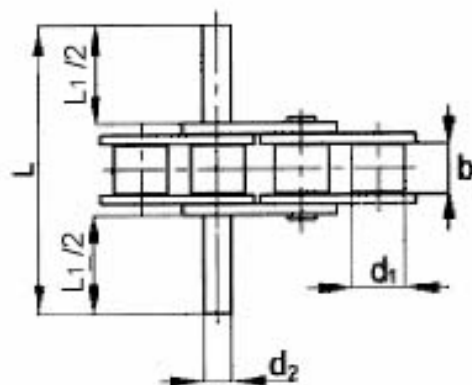
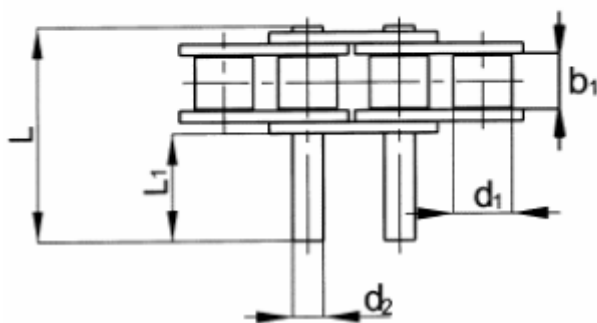
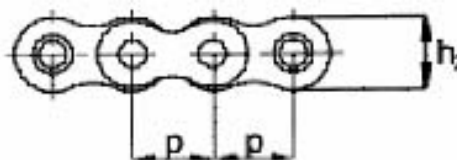
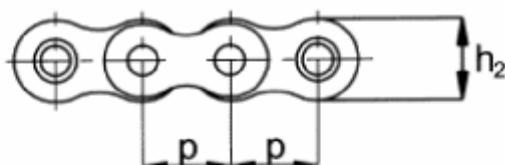
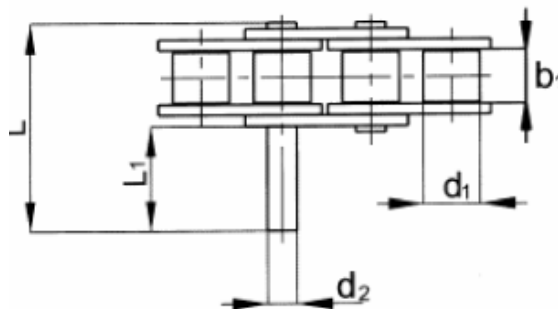
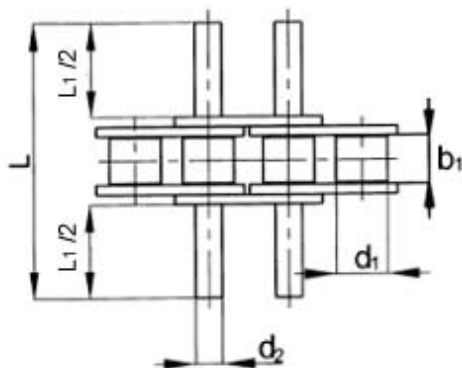
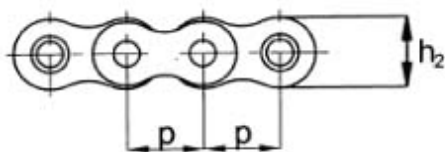


ŁAŃCUCHY ROLKOWE SPECJALNE Z WYDŁUŻONYM SWORZNIEM.

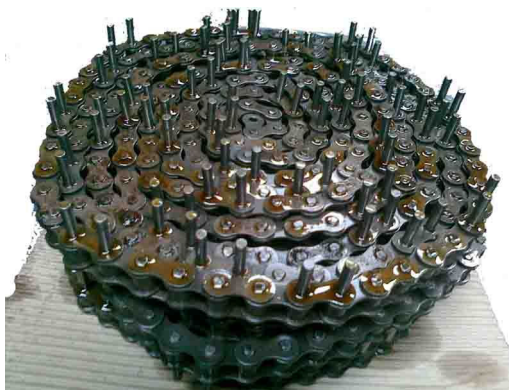

ISO DIN	Podz.	Wymiar roboczy	Rolka	Długość sworznia	Długość wystawania sworznia	Sworzeń	Wysokość płytki	Obciążenie zrywające
	P	b1 max.	d1 max	L max	L1 max	d2 max	h2 max.	Fb min.
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[N]
10B-1	15,875	9,650	10,160	36,2 / 52,8	17,6 / 34,2	5,080	14,700	22 700
12B-1	19,050	11,680	12,070	42,2 / 61,7	20,8 / 40,3	5,720	16,000	29 500
16B-1	25,400	17,020	15,880	68,0 / 99,9	33,9 / 65,8	8,280	21,000	58 000
20B-1	31,750	19,560	19,050	79,7 / 116,1	39,0 / 75,4	10,190	26,400	95 000
24B-1	38,100	25,400	25,400	101,8 / 150,2	51,2 / 99,6	14,630	33,200	170 000
28B-1	44,450	30,990	27,940	124,7 / 184,3	62,6 / 122,2	15,900	36,000	200 000
32B-1	50,800	30,990	29,210	126,0 / 184,5	62,6 / 122,2	17,810	41,000	260 000